

# Greenscreen Revive

## 5% openness

## Greenscreen® Revive™ Sunscreen

### Features

Produced from recycled plastic bottles, GreenScreen® Revive™ is a 100% recyclable, PVC-free polyester fabric that is free of heavy metals, low in VOC and made from 89% recycled content.

### Care Instructions

Brushing softly and lightly with a clean, soft bristled brush will remove any loose dirt or dust. You can also use a vacuum with a soft brush. When vacuuming, avoid pulling or stretching the fabric.

### Colour Options



Dusk

Suede

Mushroom

Sand

Linen

Stone

White



Fire retardant  
AS1530 part 2

*Luxaflex*®

# Greenscreen® Revive™ Sunscreen

## Technical information

|                         |   |
|-------------------------|---|
| Fabric Density          | Semi Transparent  |
| Composition             | 100% Polyester / 89% Recycled content   |
| Weight                  | 170g/m <sup>2</sup> ± 5%  |
| Thickness               | 0.44mm ± 5%   |
| Width                   | 3000mm  |
| Colour Fastness         | unknown   |
| Flame Retardancy        | Independently tested to AS1530 part 2. Flammability Index: 1 Range [0-20]   |
| Weave                   | Warp knit   |
| Organic emissions (VOC) | Does not exceed the maximum VOC (Volatile Organic Compound) criteria specified by the Green Building Council of Australia (IEQ-11). |
| Product Options         | Rollershades  |

| Fabric colour | Dusk | Suede | Mushroom | Sand | Linen | Stone | White |
|---------------|------|-------|----------|------|-------|-------|-------|
|---------------|------|-------|----------|------|-------|-------|-------|

### Optical/Light properties

|                            |    |     |     |     |     |     |     |
|----------------------------|----|-----|-----|-----|-----|-----|-----|
| Visual Light Transmittance | 8% | 13% | 18% | 33% | 28% | 20% | 37% |
| Openness factor (nominal)  | 5% | 5%  | 5%  | 5%  | 5%  | 5%  | 5%  |

### Heat/Solar properties


|                     |     |     |     |     |     |     |     |
|---------------------|-----|-----|-----|-----|-----|-----|-----|
| Solar transmittance | 22% | 25% | 27% | 35% | 32% | 27% | 38% |
| Solar reflectance   | 31% | 35% | 42% | 54% | 52% | 49% | 56% |
| Solar absorbance    | 47% | 40% | 31% | 11% | 16% | 24% | 6%  |

### G-value / Solar heat gain coefficient

|                                   |      |      |      |      |      |      |      |
|-----------------------------------|------|------|------|------|------|------|------|
| Glazing Type - Double glazing 6mm | 0.33 | 0.33 | 0.32 | 0.30 | 0.30 | 0.31 | 0.30 |
|-----------------------------------|------|------|------|------|------|------|------|

For more information please contact New Zealand Window Shades on 0800 223 224 or <http://www.luxaflex.co.nz/contact-us>

## Colour Options

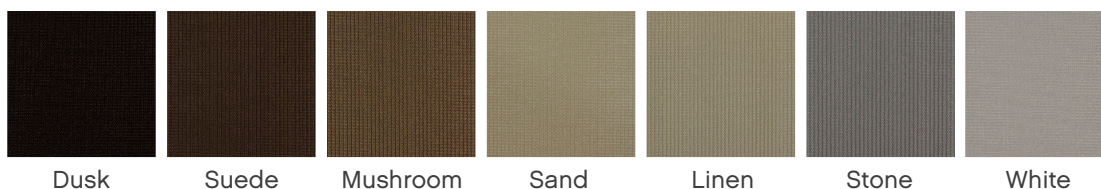

New Zealand Window Shades Ltd.  
 PO Box 12 785, Penrose, Auckland 1642, New Zealand  
 Luxaflex® is a division of New Zealand Window Shades Ltd.  
 ©Copyright 2016 New Zealand Window Shades Ltd.

