




pleated blinds specification sheet

Luxaflex[®]

WINDOW FASHIONS

www.luxaflex.co.nz

SPECIFICATION SHEET

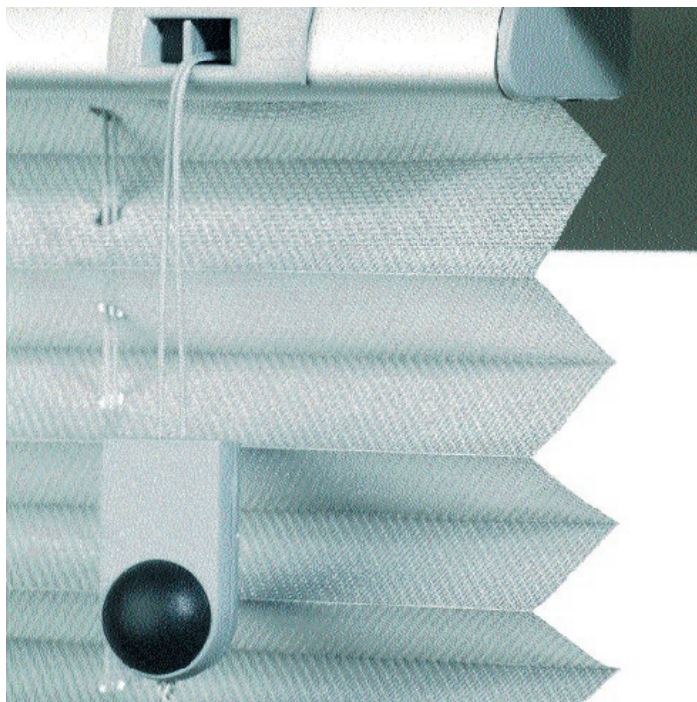

Front loading cord lock reduces light gaps

Pleated Blinds

Pleated Blinds are made from 100% woven polyester or trevira and are backed with a thin layer of aluminium. This unique invention combines the decorative qualities of fabric with the strong protection of aluminium.

All fabrics are available in 9 colours.

Fabric Range

816 Transparent fabric is made out of 100% trevira CS Polyester. This flame retardant fabric complies to Australian and European standards. 816 transparent fabric provides the maximum benefit of natural daylight all year round, whilst minimising heat loss in winter. The aluminium layer on the outside reflects solar energy (heat) in summer, and keeps warmth inside in winter.

812 Semi-transparent fabric is made out of 100% Trevira CS Polyester. This flame retardant fabric complies to Australian and European standards. 812 semi-transparent fabric removes annoying uncomfortable glare and reflection on computer screens. At the same time metallised backing will prevent instant heat gain to a large extent, so that it is a valuable contribution to climate control in the office.

878 Non transparent is made out of 100% trevira CS Polyester. This flame retardant fabric complies to Australian and European standards. 878 Non transparent fabric provides privacy and increased room darkening. Where high temperatures, intense light levels and glare combine to make offices unbearable, 878 Non transparent fabric offers very high reflective and insulative properties.




Solar properties of the fabrics, measured at 45° degrees incidence

Quality	Transmission		Reflection		Absorbtion		Shading coefficient
	Solar	Light	Solar	Light	Solar	Light	
816 FR	29%	29%	44%	43%	27%	28%	.51
812 FR	9%	9%	64%	63%	27%	28%	.32
878 FR	4%	4%	68%	67%	28%	29%	.28

Fabric specification


Quality	Fibre content	Metallisation	Weight in g/m2	Flame-retardant to DIN 4102B1	Colourfastness to ISO 105-B02		Aluminium adhesion ISO 2409 Classification 0	Anti static	Formaldehyde free	PVC free
					Colour	Metal				
816 FR	100% Trevira CS	Yes	70	Yes	>5	8	Yes	Yes	Yes	Yes
812 FR	100% Trevira CS	Yes	95	Yes	>5	8	Yes	Yes	Yes	Yes
878 FR	100% Trevira CS	Yes	142	Yes	>5	8	Yes	Yes	Yes	Yes

SPECIFICATION SHEET

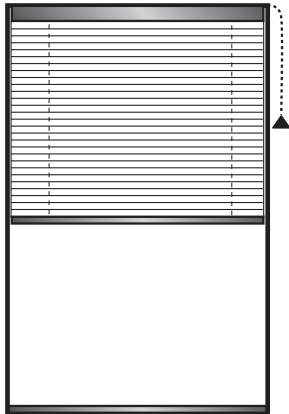


1. STANDARD operation with front loaded cord lock.

MAXIMUM: WIDTH **3400** .. DROP **3200**
 MINIMUM: WIDTH **300** .. DROP **300**
 FACTORY DEDUCTIONS: WIDTH **10** DROP **N/A**
 (inside & outside fit) Maximum area 12 sq m

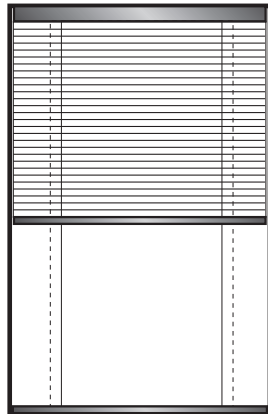


2. INCLINE 45- No side guides
Overhead position.
Hand or pole operated.
Will stop in any position.

MAXIMUM: WIDTH **2500** .. DROP **3000**
 MINIMUM: WIDTH **300** .. DROP **300**
 FACTORY DEDUCTIONS: WIDTH **10** DROP **N/A**
 (inside & outside fit) Maximum area 7.5 sq m

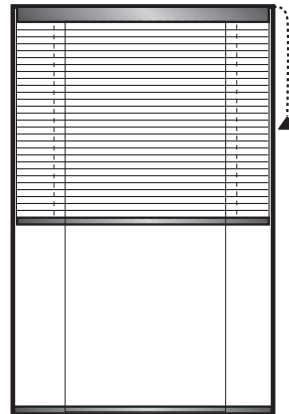


3. INCLINE 90- No side guides
Overhead position. Cord
operated, drops by gravity
needs a minimum 45° slope.

MAXIMUM: WIDTH **2500** .. DROP **3000**
 MINIMUM: WIDTH **300** .. DROP **300**
 FACTORY DEDUCTIONS: WIDTH **10** DROP **N/A**
 (inside & outside fit) Maximum area 7.5 sq m

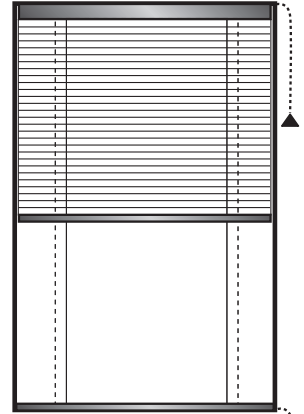


4. INCLINE 90- Dual control
Overhead position, up to 45° slope.
For applications when slope is
insufficient for the gravity effect.
Cord operated, one up, one down.

MAXIMUM: WIDTH **2500** .. DROP **3000**
 MINIMUM: WIDTH **300** .. DROP **300**
 FACTORY DEDUCTIONS: WIDTH **10** DROP **N/A**
 (inside & outside fit) Maximum area 7.5 sq m

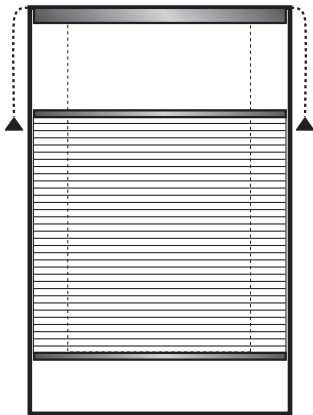


5. DUO - Top down & Bottom
up Can be lowered from top
or pulled up from bottom.

MAXIMUM: WIDTH **3400** .. DROP **3200**
 MINIMUM: WIDTH **300** .. DROP **300**
 FACTORY DEDUCTIONS: WIDTH **10** DROP **N/A**
 (inside & outside fit) Maximum area 10 sq m

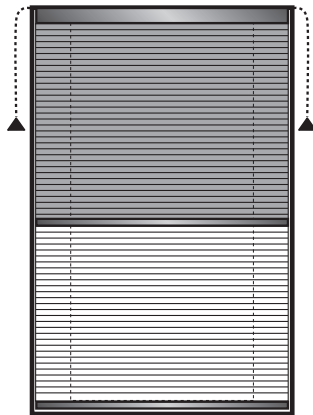


6. DAY & NIGHT
Uses 2 fabrics, sheer and block
out, (Block out always at top).

MAXIMUM: WIDTH **3400** .. DROP **3200**
 MINIMUM: WIDTH **300** .. DROP **300**
 FACTORY DEDUCTIONS: WIDTH **10** DROP **N/A**
 (inside & outside fit) Maximum area 7 sq m

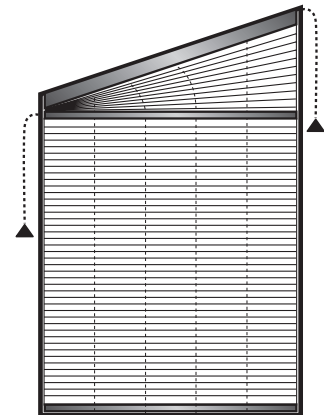

7. TRIANGLE PLUS Max slope 30°
For windows with sloping
top, blinds cord operated
separately.

MAXIMUM: WIDTH **2500** .. DROP **2500**
 MINIMUM: WIDTH **300** .. DROP **300**
 FACTORY DEDUCTIONS: WIDTH **N/A** DROP **N/A**
 (inside & outside fit) Maximum area 6.25 sq m




8. TRIANGULAR CORD
OPERATED
(Template required)

MAXIMUM: WIDTH **2500** .. DROP **1600**
 MINIMUM: WIDTH **300** .. DROP **300**
 FACTORY DEDUCTIONS: WIDTH **N/A**
 DROP **N/A**
 (inside & outside fit) Maximum area 4 sq m



9. TRIANGULAR FIXED
(Template required)
Can be used in overhead
applications.


MAXIMUM: WIDTH **2000** .. DROP **1600**
 MINIMUM: WIDTH **300** .. DROP **300**
 FACTORY DEDUCTIONS: WIDTH **N/A** DROP **N/A**
 (inside & outside fit) Maximum area 3.2 sq m



SPECIFICATION SHEET


HEADRAIL

- Manufactured from extruded aluminium alloy.
- Asymmetric profile
- Wall thickness 1.5mm
- Width 33mm
- Height 20mm




BOTTOM RAIL

- Manufactured from extruded aluminium alloy
- Segment of circle profile
- Wall thickness 1.5mm
- Width 30mm
- Height 12mm



RAIL COLOURS

- Silver anodised
- Ebony powder coated
- Wedgewood powder coated
- Moss green powder coated
- Sandy beige powder coated

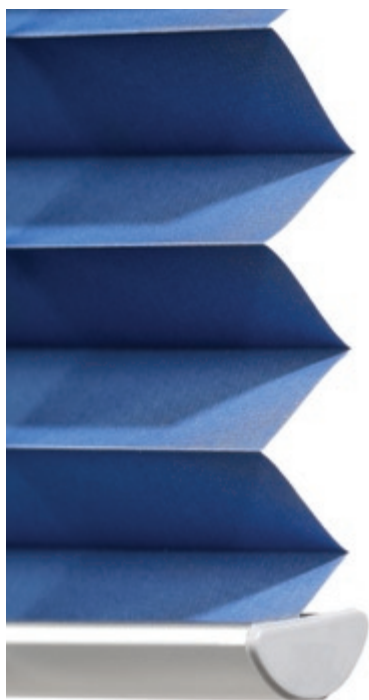

Asymmetrical bottom rail

INNER RAIL INSERT

Manufactured from uv stabilised Acrylonitrile Butadiene Styrene. (ABS) Plastic.



Fabric is attached to this plastic extrusion and then held in position with end caps

END CAPS

Manufactured from UV Stabilised Polymer acrylic.

LIFT CORDS

Braided polyester. Minimum diameter 2.2mm

BLIND CORDS (run through fabric)

Braided polyester. Minimum diameter 1.0mm

CORD LOCK (ULTUM / PPS - Fortran)

Front mounted colour grey with colour co ordinated cover plate.


INSTALLATION BRACKET

Electroplated steel top or face fixing concealed when installed.

A) Top fixing / Inside fixing




B) Top fixing bracket with clip on face mounting extension



RECESSED HEAD DETAIL


RECESS SIZE

- 80mm x 80mm

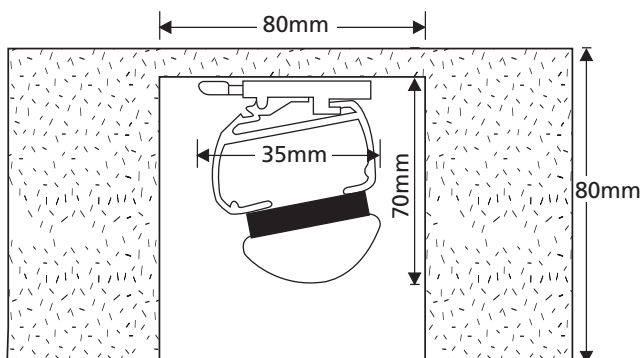

SPECIFICATION SHEET

Integrated and thermal optical properties	Fabric density	816 Transparent	
	Fabric colour	000	
	Solar transmittance	29%	
	Solar reflectance outside	44%	
	Solar absorbance	27%	
	Luminous transmittance	29%	
	Luminous reflectance outside	43%	
	Luminous absorbance	28%	
	UV transmittance	27%	
	Openness factor (nominal)	23%	
Glazing Type	Ra[Colour rendering index]	98	
		Single 3mm Clear Glass	Solar Control Glazing
	Light transmittance	28%	22%
	G-value	44%	24%
	Shading coefficient	51%	28%
	U-value (W/m ² K)	2.5	0.8
Fabric	Yarn composition: Trevira CS	Weight (g/m ²): 70	Thickness (mm): 0.23
Aluminium adhesion	ISO 2409 classification 0		
Aluminium retention	Water vapour test	Percentage loss aluminium	
		After 30mins - 0% After 2hrs - 50%	
	Sulphur dioxide test	Percentage loss aluminium	
		After 3hrs - 0% After 5hrs - 40%	
Pleat retention	AWTAtest - 100% heat applied to 30 pleats	Retention - 10 pleats	
Corrosion resistance	Metal layer EN ISO 3231		
Noise reduction	ASTMtest C423-84a	Coefficient of 0.35 sabin/sq.ft	
Colour fastness	Colour >5		
DIN 54004	Metal 8		
816 fabric is Anti static, PVC Free and Formaldehyde Free			
Flame retardancy AS1530.3-1989	Ignitability index	0	Range [0-20]
	Spread of flame index	0	Range [0-10]
	Heat evolved index	0	Range [0-10]
	Smoke developed index	0-1	Range [0-10]

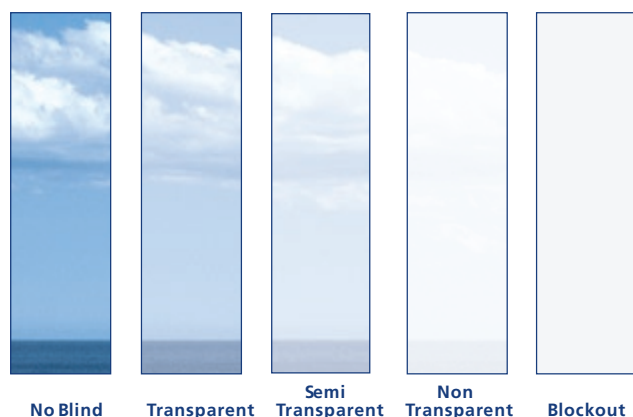

FABRIC INFORMATION



Flame Retardant

TRANSPARENT - Metallised

SYSTEMS AVAILABLE



Roller Blinds



Pleated Blinds

FEATURES

816 is a highly transparent, metal backed fabric, woven from 100% Trevira CS and is inherently fibre flame retardant. 816 provides excellent vision out, heat control in summer and insulation against heat loss in winter.

816 offers high performance, independent of colour.

816 is woven to 2200mm in width and designed specifically for pleated, roller, twin and motorised blind systems.

Note: All presented data calculated in WIS 3.0.1 (Advanced Windows Information System) with spectral data. Specifications and other data are based on information available at the time of preparation of this document and are subject to production tolerances and/or change without prior notice. Fire retardancy information is sourced from AWTa testing results. Please note that test results may vary slightly depending on fabric colour. [Solar Control Glazing EN 13363-2, ISO 15099, Measurements according to EN410], [3mm Single Glass (Pilkington OpCL_3.plg) according to EN410, ISO 9050 and ISO 15099 without ventilation].

Luxaflex[®]

WINDOW FASHIONS

www.luxaflex.co.nz



Luxaflex[®]

WINDOW FASHIONS

www.luxaflex.co.nz

Luxaflex[®] is a division of New Zealand Window Shades Ltd. Luxaflex[®] is a registered trade mark of New Zealand Window Shades Ltd.

New Zealand Windows Shades Limited, 2 - 6 Niall Burges Road, Mt Wellington, Auckland, New Zealand.

PO Box 12 785, Penrose, Auckland. Telephone 0800 223 224, Facsimile 09 573 6198